

Ståltau og tilbehør


Steel wire rope and accessories

PYTHON COMPAC 35 / COMPAC 35 P

Application Information

Breaking strength	●●●●○
Bending performance	●●●●○
Drum crush resistance	●●●●○
Abrasion resistance	●●●●○
Lateral pressure stability	●●●●○

Rotation resistant	Yes
Use with swivel	Yes
Rec. max fleet angle	2,0°
Multi layer suited	Yes

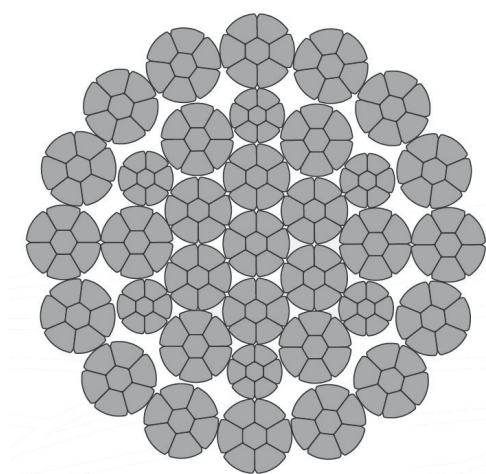

HIPAC

optionally available with
PlastGuard protection
as COMPAC 35 P
[same breakloads apply]

Rope characteristics

HiPac compacted, flexible rope with a very high breaking load, perfectly suited for multi layer spooling. Due to the complex LongLife core design the rope is very flexible and durable over competitive products with low number of inner strands. Excellent results on tower cranes, mobile cranes, crawler cranes and offshore pedestal cranes. Available in high diameters for offshore winches and knuckle boom cranes.

Construction	Number of wires	Load bearing outer wires
10 - 48 mm: 35(W)xK7-KWSC	245	112
49 - 59 mm: 35(W)xK17S-KWSC	537	272
60 - 80 mm: 35(W)xK19W-KWSC	647	304
81 - 100 mm: 35(W)xK25F-KWSC	850	304
100+ mm: 35(W)xK31WS-KWSC	1018	496
Number of strands	Manufacturing tolerance	Available in
35	+2% / +4%	regular- / lang lay

Vi tar forbehold om trykkfeil og fremtidige endringer i spesifikasjoner. Produktene kan avvike noe fra avbildet modell.

Tlf: +47 51 64 69 90 E-post: post@john-dahle.no www.john-dahle.no