

Fiberstropper og lastsikringer

Synthetic slings and lashing belts

Lastsikring med kroker




Lashing belt with hooks

Materiale: Polyester / gulkromatisert stål

Standard: NS-EN 12195-2

NB! Oppgitt styrke er ved sikkerhetsfaktor 2:1.

Artikkelnummer	Surringsstyrke tonn	Styrke tonn	Båndbredde mm	Lengde meter	Vekt kg	Bilde-referanse
0730006	0,5	0,25	25	0,5 + 5,5	0,40	A
0730206	1	0,50	25	0,5 + 5,5	0,46	B
0730506	2	1,00	35	0,5 + 5,5	0,94	C
0730510	2	1,00	35	0,5 + 9,5	1,14	C
0730520	3	1,50	35	0,5 + 5,5	1,44	D
0730804	4	2,00	50	0,5 + 3,5	2,07	E
0730810	4	2,00	50	0,5 + 9,5	2,67	E
0731006	5	2,50	50	0,5 + 5,5	2,47	F
0731008	5	2,50	50	0,5 + 7,5	2,72	F
0731010	5	2,50	50	0,5 + 9,5	2,97	F
0731015	5	2,50	50	0,5 + 14,5	3,62	F
0741205	10	5,00	75	0,5 + 4,5	6,48	G
0741210	10	5,00	75	0,5 + 9,5	7,93	G
0741220	10	5,00	75	0,5 + 19,5	10,83	G

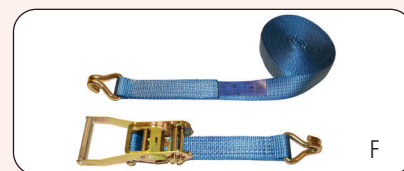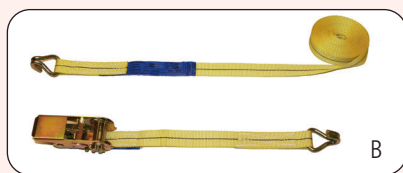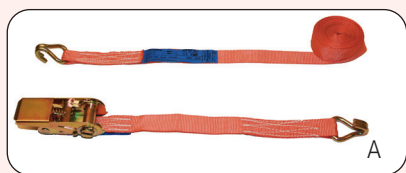

Lastsikring med kroker, rustfritt syrefast stål

Lashing belt with hooks, stainless steel

Materiale: Polyester / rustfritt stål AISI 316

NB! Oppgitt styrke er ved sikkerhetsfaktor 2:1.



Artikkelnummer	Surringsstyrke tonn	Styrke tonn	Båndbredde mm	Lengde meter	Vekt kg
0730106	0,5	0,25	25	0,5 + 5,5	0,46
0730135	1,5	0,75	35	0,5 + 9,5	1,14
0730150	2,5	1,25	50	0,5 + 9,5	2,97